

Docket No. 2000-0025

NONPROVISIONAL PATENT APPLICATION

OLIFF & BERRIDGE, PLC

P.O. Box 19928

Alexandria, Virginia 22320

Telephone: (703) 836-6400

Facsimile: (703) 836-2787

jc639 U.S. PTO



02/01/00

Attorney Docket No.: 2000-0025

Date: February 1, 2000

BOX PATENT APPLICATION

NONPROVISIONAL APPLICATION TRANSMITTAL
RULE §1.53(b)

jc525 U.S. PTO

09/495175



Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

Transmitted herewith for filing under 37 C.F.R. §1.53(b) is the nonprovisional patent application

For (Title): MULTIMEDIA INTEGRATION DESCRIPTION SCHEME, METHOD AND SYSTEM FOR MPEG-7

Casename:

By (Inventors): Qian HUANG (Ocean, NJ); Atul PURI (Riverdale, NY); Ana B. BENITEZ (New York, NY); Seungyup PAEK; Shih-Fu CHANG (New York, NY)

- ☒ Formal drawings (Figs. 1-6; six sheets) are attached.
- ☐ A Declaration and Power of Attorney is filed herewith.
- ☐ An assignment of the invention to _____ is filed herewith.
- ☐ An Information Disclosure Statement is filed herewith.
- ☐ A Preliminary Amendment is filed herewith.
- ☐ Please amend the specification by inserting before the first line the sentence --This nonprovisional application claims the benefit of U.S. Provisional Application No. _____, filed _____.
- ☐ Priority of foreign application (s) No. _____ filed _____ in _____ is claimed under 35 U.S.C. §119.
- ☐ A certified copy of the above corresponding foreign application(s) is filed herewith.
- ☒ The filing fee is calculated below:

CLAIMS IN THE APPLICATION AFTER ENTRY
OF ANY PRELIMINARY AMENDMENT NOTED ABOVE

FOR:	NO. FILED	NO. EXTRA	RATE	FEE
BASIC FEE				\$ 690
TOTAL CLAIMS	24 - 20	= 4	x 18	\$ 72
INDEP CLAIMS	2 - 3	= 0	x 78	\$
<input type="checkbox"/> MULTIPLE DEPENDENT CLAIMS PRESENTED			+260	\$
* If the difference is less than zero, enter "0".			TOTAL	\$ 762

- ☒ Check No. 106094 in the amount of \$762.00 to cover the filing fee is attached. Except as otherwise noted herein, the Commissioner is hereby authorized to charge any other fees that may be required to complete this filing, or to credit any overpayment, to Deposit Account No. 15-0461. Two duplicate copies of this sheet are attached.
- ☒ Please address all correspondence to S. H. Dworetzky, AT&T Corp., P.O. Box 4110, Middletown, New Jersey 07748. However, telephone calls should be made to Thomas A. Restaino at (908) 221-5720.

Respectfully submitted,

James A. Oliff, Reg. No. 27,075

Ronald E. Prass, Jr., Reg. No. 42,089
Attorney for Applicants

JAO:REP/tlp

Date: February 1, 2000

OLIFF & BERRIDGE, PLC

P.O. Box 19928

Alexandria, Virginia 22320

Telephone: (703) 836-6400

PT 13 8/92

DEPOSIT ACCOUNT USE
AUTHORIZATION
Please grant any extension
necessary for entry;
Charge any fee due to our
Deposit Account No. 15-0461

MULTIMEDIA INTEGRATION DESCRIPTION SCHEME, METHOD AND SYSTEM FOR MPEG-7

This non-provisional application claims the benefit of U.S. Provisional Application No. 60/118,022, filed February 1, 1999.

5 This application includes an Appendix containing computer code that performs content description in accordance with the exemplary embodiment of the present invention. That Appendix of the disclosure of this patent document contains material which is subject to copyright protection. The copyright owner has no objection to the facsimile reproduction by any-one of the patent document or the patent disclosure, as it
10 appears in the Patent and Trademark Office patent file or records, but otherwise reserves all copyright rights whatsoever.

BACKGROUND OF THE INVENTION

1. Field of Invention

 The present invention generally relates to audiovisual data representation. More
15 particularly, this invention relates to integrating the descriptions of multiple categories of audiovisual content to allow such content to be searched or browsed with ease in digital libraries, Internet web sites and broadcast media, for example.

2. Description of Related Art

 More and more audiovisual information is becoming available from many sources
20 around the world. Such information may be represented by various forms of media, such as still pictures, video, graphics, 3D models, audio and speech. In general, audiovisual information plays an important role in our society, be it recorded in such media as film or magnetic tape or originating, in real time, from some audio or visual sensors, be it analogue or, increasingly, digital.

25 While audio and visual information used to be consumed directly by the human being, computational systems are increasingly creating, exchanging, retrieving and re-processing this audiovisual information. Such is the case for image understanding, e.g., surveillance, intelligent vision, smart cameras, etc., media conversion, e.g., speech to text,

picture to speech, speech to picture, etc., information retrieval, e.g., quickly and efficiently searching for various types of multimedia documents of interest to the user, and filtering to receive only those multimedia data items which satisfy the user's preferences in a stream of audiovisual content.

5 For example, a code in a television program triggers a suitably programmed VCR to record that program, or an image sensor triggers an alarm when a certain visual event happens. Automatic transcoding may be performed based on a string of characters or audible information or a search may be performed in a stream of audio or video data. In all these examples, the audiovisual information has been suitably "encoded" to enable a
10 device or a computer code to take some action.

In the infancy of web-based information communication and access systems, information is routinely transferred, searched, retrieved and processed. Presently, much of the information is predominantly represented in text form. This text-based information is accessed using text-based search algorithms.

15 However, as web-based systems and multimedia technology continue to improve, more and more information is becoming available in a form other than text, for instance as images, graphics, speech, animation, video, audio and movies. As the volume of such information is increasing at a rapid rate it is becoming important to be easily to be able to search and retrieve a specific piece of information of interest. It is often difficult to search
20 for such information by text-only search. Thus the increased presence of multimedia information and the need to be able to find the required portions of it in an easy and reliable manner, irrespective of the search engines employed, has spurred on the drive for a standard for accessing such information.

The Moving Pictures Expert Group (MPEG) is a working group under the
25 International Standards Organization/International Electrotechnical Commission in charge of the development of international standards for compression, decompression, processing and coded representation of video data, audio data and their combination. MPEG previously developed the MPEG-1, MPEG-2 and MPEG-4 standards, and is presently developing the MPEG-7 standard, formally called "Multimedia Content
30 Description Interface", hereby incorporated by reference in its entirety.

MPEG-7 will be a content representation standard for multimedia information search and will include techniques for describing individual media content and their combination. Thus, MPEG-7 standard is aiming to providing a set of standardized tools to describe multimedia content. Therefore, the MPEG-7 standard, unlike the MPEG-1, 5 MPEG-2 or MPEG-4 standards, is not a media content coding or compression standard but rather a standard for representation of descriptions of media content. The data representing descriptions is called "meta data". Thus, irrespective of how the media content is represented, i.e., analogue, PCM, MPEG-1, MPEG-2, MPEG-4, Quicktime, Windows Media etc, the meta data associated with this content, may in future, be MPEG- 10 7.

Often, the value of multimedia information depends on how easily it can be found, retrieved, accessed, filtered and managed. In spite of the fact that users have increasing access to this audiovisual information, searching, identifying and managing it efficiently is becoming more difficult because of the sheer volume of the information. 15 Moreover, the question of identifying and managing multimedia content is not just restricted to database retrieval applications such as digital libraries, but extends to areas such as broadcast channel selection, multimedia editing and multimedia directory services.

Although techniques for tagging audiovisual information allow some limited 20 access and processing based on text-based search engines, the amount of information that may be included in such tags is somewhat limited. For example, for movie videos, the tag may reflect name of the movie or list of actors etc., but this information may apply to the entire movie and may not be sub-divided to indicate the content of individual shots and objects in such shots. Moreover, the amount of information that may be included in 25 such tags and architecture for searching and processing that information is severely limited.

SUMMARY OF THE INVENTION

The invention provides a system and method for integrating multimedia descriptions in a way that allows humans, software components or devices to easily 30 identify, manage, manipulate, and categorize the multimedia content. In this manner, a

user who may be interested in locating a specific piece of multimedia content from a database, Internet, or broadcast media, for example, may search for and find the of the multimedia content.

In this regard, the invention provides a system and method that receives
5 multimedia content from a multimedia stream and separates the multimedia content into separate components which are assigned to single media categories, such as image, video, audio, synthetic audiovisual, and text. Within each of the single media categories, media events are classified and descriptions of such single media events are generated. These descriptions are then integrated and formatted, according to a multimedia integration
10 description scheme. Multimedia integration description is then generated for the multimedia content. The multimedia description is then stored into a database.

As a result, a user may query a search engine which then retrieves the multimedia integration description from the database. The search engine can then provide the user a useful search result whose multimedia integration description meets the query
15 requirements.

The exemplary embodiment of the invention addresses the draft requirements of MPEG-7 promulgated by MPEG at the time of the filing of this patent application. That is, the invention provides object-oriented, generic abstraction and uses objects and events as fundamental entities for description. Thus, the invention provides an efficient
20 framework for description of various types of multimedia data.

The invention is also a comprehensive tool for describing multimedia data because it uses eXtensible Markup Language (XML), which is self describing. The present invention also provides flexibility because parts can be instantiated so as to provide efficient organization. The invention also provides extensibility and the ability to
25 define relationships between data because elements defined in the description scheme can be used to derive new elements.

These and other features and advantages of this invention are described in or are apparent from the following detailed description of the system and method according to this invention.

BRIEF DESCRIPTION OF THE DRAWINGS

The preferred embodiments of the invention will be described in detail with reference to the following figures wherein:

Fig. 1A is an exemplary block diagram showing a multimedia integration system;

5 Fig. 1B is an exemplary block diagram of an exemplary individual media type descriptor generation unit shown in Fig. 1A;

Fig. 2 is an exemplary block diagram of the multimedia integration description scheme unit in Fig. 1A;

10 Fig. 3 is an example of a multimedia stream, consisting of multimedia objects and single-media objects, and the relationship among these objects;

Fig. 4 is a UML representation of the multimedia description scheme at the multimedia stream level which consists of one or more multimedia objects;

Fig. 5 is a UML representation of the multimedia description scheme at the multimedia object level; and

15 Fig. 6 is an exemplary flowchart showing the process of generating integrated multimedia content description for multimedia content.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

20 Prior to explaining the exemplary embodiment of the invention, a synopsis of MPEG-7 is provided to aid in the reader's understanding of how the exemplary embodiment processes multimedia data within the construct of MPEG-7.

MPEG-7 is the result of a global demand that has logically followed the increasing availability of digital audiovisual content. Audiovisual information, both natural and synthetic, will continue to be increasingly available from many sources around the world. Also, users want to use this audiovisual information for various purposes. However, before the information can be used, it must be identified, located, indexed, and even characterized properly. At the same time, the increasing availability of potentially interesting material makes searching more difficult because of the increasingly voluminous pool of information to be searched.

30 MPEG-7 is directed at standardizing the interface for describing multimedia content to allow efficient searching and retrieval for various types of multimedia material

interesting to the user. MPEG-7 is meant to provide standardization of multimedia content descriptions. MPEG-7 expects to extend the limited capabilities of proprietary solutions in identifying content that exist today, notably by including more data types. In other words, MPEG-7 will specify a standard set of descriptors that can be used to

5 describe various types of multimedia information. MPEG-7 will also specify predefined structures of descriptors and their relationships, as well as ways to define one's own structures. These structures are called description schemes (DSs). Defining new description schemes can be performed using a special language, the description definition language (or DDL), which is also a part of the MPEG-7 standard. The description, i.e., a

10 set of instantiated description schemes, is associated with the content itself to allow fast and efficient searching for material of a user's interest. MPEG-7 will also include coded representations of a description for efficient storage, or fast access.

Conventionally, search engines each have individual syntax formats that differ. These differences in syntax format cause compatibility issues between search criteria,

15 e.g., identical criteria used by different engines results in different results. With the use of description schemes under MPEG-7, these search engines will be able to process MPEG-7 multimedia contents regardless of the differing syntax formats to produce the same results.

The requirements of MPEG-7 apply, in principle, to both real time and non-real

20 time applications. Also, MPEG-7 will apply to push and pull applications. However, MPEG-7 will not standardize or evaluate applications. Rather, MPEG-7 will interact with many different applications in many different environments, which means that it will need to provide a flexible and extensible framework for describing multimedia data.

Therefore, MPEG-7 will not define a monolithic system for content description.

25 Rather, MPEG-7 will define a set of methods and tools for describing multimedia data. Thus, MPEG-7 expects to standardize a set of descriptors, a set of description schemes, a language to specify description schemes (and possibly descriptors), e.g., the description definition language, and one or more ways to encode descriptions. A starting point for the description definition language is the XML, although it is expected that the basic XML

30 will eventually need to be customized and modified for use in MPEG-7.

The exemplary embodiment of the invention described herein with reference to Figs. 1A-6 conforms to the requirements of the MPEG-7 standard, in its present form.

The following description of the particular embodiment of the invention uses terminology that is consistent with definitions provided in the MPEG-7 standard. The term "data" indicates audiovisual information that is described using MPEG-7, regardless of storage, coding, display, transmission, medium or technology. Data encompasses, for example, graphics, still images, video, film, music, speech, sounds, text and any other relevant audiovisual medium. Examples of such data may be found in, for example, an MPEG-4 stream, a video tape, a compact disc containing music, sound or speech, a picture printed on paper or an interactive multimedia installation on the web.

A "feature" indicates a distinctive characteristic of the data which signifies something to someone. Examples of features include image color, speed pitch, audio segment rhythm, video camera motion, video style, movie title, actors' names in a movie, etc. Examples of features of visual objects include shape, surface, complexity motion, light, color, texture, shininess and transparency.

A "descriptor" is a representation of a feature. It is possible to have several descriptors representing a single feature. A descriptor defines the syntax and the semantics of the feature representation and allows the evaluation of the corresponding feature via the descriptor value. Examples of such descriptors include color histogram, frequency component average, motion field, title text, etc.

A "descriptor value" is an instantiation of a descriptor for a given data set. Descriptor values are combined using a description scheme to form a description.

A "description scheme", specifies the structure and semantics of relationships between its components, which may be both descriptors and description schemes. The distinction between a description scheme and a descriptor is that a descriptor contains only basic data types, as provided by the description definition language. A descriptor also does not refer to another descriptor or description scheme.

A "description" is the result of instantiating a description scheme. To instantiate a description scheme, a set of descriptor values that describe the data is structured according to a description scheme. Depending on the completeness of the set of

descriptor values, the description scheme may be fully or partially instantiated.

Additionally, it is possible that the description scheme may be merely incorporated by reference in the description rather than being actually present in the description. A

"coded description" is a description that has been encoded to fulfill relevant requirements such as compression efficiency, error resilience, random access, etc.

The "description definition language (DDL)" is the language that allows the creation of new description schemes and, possibly, new descriptors. The description definition language also allows the extension and modification of existing description schemes.

MPEG-7 data may be physically located with the associated audiovisual material, in the same data stream or on the same storage system, but the descriptions can also be stored elsewhere. When the content and its descriptions are not co-located, mechanisms that link audiovisual material and their MPEG-7 descriptions are needed; these links must work in both directions.

The exemplary embodiment meets the present MPEG-7 requirements outlined in the present draft of MPEG-7 standard requirements. Requirements include criteria relating to descriptors, description scheme requirements, the description definition language requirements and system requirements. While the exemplary embodiment of the invention should satisfy all requirements of MPEG-7 when taken as a whole, not all requirements have to be satisfied by each individual descriptor or description scheme.

The descriptor requirements include cross-modality, direct data manipulation, data adaptation, language of text-based descriptions, linking, prioritization of related information and unique identification. Description scheme requirements include description scheme relationships, descriptor prioritization, descriptor hierarchy, descriptor scalability, temporal range description, data adaptation, compositional capabilities, unique identification, primitive data types, composite data types, multiple media types, various types of description scheme instantiations, relationships within a description scheme and between description schemes, relationship between description and data, links to ontologies, platform independence, grammar, constraint validation, intellectual property management and protection, human readability and real time support.

While a description scheme can be generated using any description definition language, the exemplary embodiment of the invention uses eXtensible Markup Language (XML) to represent the integration description scheme. XML is a useful subset of SGML. XML is easier to learn, use and implement than SGML. XML allows for self description, i.e., allows description and structure of description in the same format and document. Use of XML also allows linking of collections of data by importing external document type definitions using description schemes.

Additionally, XML is highly modular and extensible. XML provides a self describing and extensible mechanism, and although not media centric, can provide a reasonable starting basis. Another major advantage of using XML is that it allows the descriptions to be self-describing, in the sense that they combine the description and the structure of the description in the same format and document. XML also provides the capability to import external document type definitions (or DTDs), e.g., for feature descriptors, into the image description scheme document type definitions in a highly modular and extensible way.

According to the exemplary embodiment of the invention, each multimedia component description can include multimedia component objects. Each multimedia component object has one or more associated multimedia component features. The multimedia component features of an object are grouped together as being visual, audio or a relationship on semantic or media. In the multimedia component description scheme, each feature of an object has one or more associated descriptors.

The multimedia description scheme also includes specific document type definitions, also generated using the XML framework, to provide example descriptors. The document type definition provides a list of the elements, tags, attributes, and entities contained in the document, and their relationships to each other. Document type definitions specify a set of rules for the structure of a document. For example, a document type definition specifies the parameters needed for certain kinds of documents. Using the multimedia description scheme, document type definitions may be included in the file that contain the document they describe. In such a case, the document type definition is included in a document's prolog after the XML declaration and before the

actual document data begins. Alternatively, the document type definition may be linked to the file from an external URL. Such external document type definitions can be shared by different documents and Web sites. In such a way, for a given descriptor, the multimedia description scheme can provide a link to external descriptor extraction code and descriptor similarity code.

Audiovisual material that has MPEG-7 data associated with it, may include still pictures, graphics, 3D models, audio, speech, video, and information about how these elements are combined in a multimedia presentation, i.e., scenario composition information. A special case of this general data type may include facial expressions and personal characteristics.

Fig. 1A is a block diagram of an exemplary multimedia description integration system 100. The multimedia integration description system 100 includes global media description unit 110, local media description unit 120, integration descriptors unit 150, multimedia integration description scheme unit 160, and multimedia integration description generator 165.

The global media description unit 110 includes a global description generation unit 115 which receives multimedia content and provides global descriptions to the integration descriptors unit 150. The global descriptions provided to the integration descriptors unit 150 are descriptions that are relevant to the multimedia content as a whole, such as time, duration, space, etc. The local media description unit 120 includes description generation units for various categories of multimedia content including image description generation unit 125, video description generation unit 130, audio description generation unit 135, synthetic audiovisual description generation unit 140 and text description generation unit 145.

While Fig. 1A illustrates the relationship between the integration description scheme and five categories of single media descriptions, one skilled in the art may appreciate that these categories are exemplary and therefore, may be subdivided or reclassified into a greater or lesser number of categories. In that regard, the exemplary embodiment illustrated in Fig. 1A illustrates how multimedia content can be divided and categorized into 5 various descriptions categories.

The multimedia integration description scheme unit 160 contains description schemes for integrating one or more of the description categories. In other words, the multimedia integration description scheme unit 160 maps how image, video, audio, synthetic and/or text descriptions, as descriptions of the component objects of a multimedia object, should be combined to form the description of the composite multimedia object and to be stored for easy retrieval. The multimedia integration description scheme unit 160 also provides input to the integration descriptors unit 150 so that it can provide proper descriptor values to the multimedia integration description generator 165.

The multimedia integration description generator 165 generates a multimedia integration description based on the one or more of the image, video, audio, synthetic and/or text descriptions received from the description generation units 125-145, the descriptor values received from the integration descriptors unit 150 and the multimedia integration description scheme received from the multimedia integration description scheme unit 160. The multimedia integration description generator 165 generates the multimedia integration description and stores the description in the database 170.

Once the multimedia integration description has been stored, a user terminal 180, for example, may request multimedia content from a search engine 175. The search engine 175 then retrieves the multimedia content descriptions, whose multimedia integration descriptions meet what the user requested, from the database 170 and provides the retrieved multimedia content descriptions to the user at terminal 180.

Fig. 1B is an exemplary block diagram of one of the individual media type descriptor generation units (i.e., the image, video, audio, synthetic and text description generation units 125-145) shown in Fig. 1A. The individual media type description generation unit 121 includes a feature extractor and descriptors representation unit 122, an individual media type content description generator 123, and individual media type description scheme unit 124.

The feature extractor and descriptors representation unit 122 receives individual media type content and extract features from the content. The extracted features are represented by descriptor values which are output to the individual media type content

description generator 123. The individual media type content description generator 123 uses the individual media type description scheme provided by the individual media type description scheme unit 124 and the descriptor values provided by feature extractor and descriptors representation unit 122 to output the content description which is sent to the multimedia integration description generator 165, shown in Fig. 1A.

Fig. 2 shows the multimedia integration scheme unit 160. The multimedia integration scheme unit 160 interacts with a global media description scheme 115, an image description scheme 220, a video description scheme 230, an audio description scheme 240, a synthetic audiovisual description scheme 250 and a text description scheme 260, which provide description schemes inputs to the multimedia integration description scheme 210. The multimedia integration description scheme 210 also receives input from integration descriptors 205.

In this manner, the integration descriptors 205 and the description schemes 215-260 provide individual maps for each category of multimedia content. The description schemes 220-260 provide description schemes for individual multimedia categories which are integrated into a composite multimedia description scheme 210. The multimedia integration description scheme 210 is used by the multimedia integration description generator 165 to generate a multimedia integration description for the multimedia content which is then stored in the database 170 for future retrieval by search engine 175.

The multimedia integration description scheme (or MMDS) 210 describes multimedia content which may contain composing data from different media type, such as images, natural video, audio, synthetic video, and text. The multimedia integration description scheme 210 is configured to meet the requirements for multimedia integration description schemes specified by MPEG-7, for example, and is independent of any description definition language. The multimedia integration description scheme 210 is also configured to achieve the maximum synergy with the separate description schemes, such as the image, video, audio, synthetic, and text description schemes 220-260.

In the multimedia integration description scheme 210, a multimedia stream is represented as a set of relevant multimedia objects that can be further organized by using object hierarchies. Relationships among multiple multimedia objects that can not be expressed using a tree structure are described using entity relation graphs. Multimedia objects can include multiple features, each of which can contain multiple descriptors. Each descriptor can link to external feature extraction and similarity matching code. Features are grouped according to the following categories: media features, semantic features, and temporal features.

At the same time, each multimedia object includes a set of single-media objects, which together form the multimedia object. Single-media objects are associated with features, hierarchies, entity relation graphs, and multiple abstraction levels, as described by single media description schemes (image, video, etc.). Multimedia objects are an association of multiple single-media objects, for example, a video object corresponding to a person, an audio object corresponding to his speech and the text object corresponding to the transcript.

The multimedia integration description scheme 210 includes the flexibility of the object-oriented framework which is also found in the individual media description schemes. The flexibility is achieved by (1) allowing parts of the description scheme to be instantiated; (2) using efficient categorization of features and clustering of objects (using the indexing hierarchy, for example); and (3) supporting efficient linking, embedding, or downloading of external feature descriptor and execution codes.

Elements defined in the multimedia integration description scheme 210 can be used to derive new elements for different domains. As mentioned earlier, it has been used in description scheme for specific domain (e.g., home media).

One unique aspect of the multimedia integration description scheme 210 is the capability to define multiple abstraction levels based on any arbitrary set of criteria. The criteria can be specified in terms of visual features (e.g., size), semantic relevance (e.g., relevance to user interest profile), or service quality (e.g., media features).

The multimedia integration description scheme 210 aims at describing multimedia content resulting from integration of multiple media streams. Examples of individual media streams are images, audio sequences, natural video sequences, synthetic video sequences, and text data. An example of such integrated multimedia stream is a

5 television program that includes video (both natural and synthetic), audio, and text streams.

Under the multimedia integration scheme, a multimedia stream is represented as a set of multimedia objects that include objects from the composing media streams. Multimedia objects are organized in object hierarchies or in entity relation graphs.

10 Relationships among two or more multimedia objects that can not be expressed in a tree structure can be described using multimedia entity relation graphs. The tree structures can be efficiently indexed and traversed, while the entity relation graphs can model general relationships.

The multimedia integration description scheme 210 builds on top of the individual

15 media description schemes, including the image, video, audio, synthetic and text description schemes. All elements and structures used in the multimedia integration description scheme 210 are intuitive extensions of those used in individual media description schemes.

Fig. 3 is the example showing the basic elements and structures of the multimedia

20 integration description scheme 210. The explanation will include example XML with the specific document type definition declarations included in Appendix A. A more complete listing of the XML description of the multimedia stream in Fig. 3 is included in Appendix B.

Figs. 4 and 5 show the graphical representation of the proposed multimedia

25 description scheme following the UML notations. Figs.4 and 5 clearly show the relationships of the multimedia description scheme 210 with description schemes 220-260 for individual media. It should be emphasized that the same structure is used at the

multimedia object level and the single-media object level for the description schemes of the individual media: image, video, etc.

The multimedia stream element (<MM_Stream>) refers to the multimedia content being described. The multimedia stream is represented as one set of multimedia objects
 5 (<MM_Object_Set>, zero or more object hierarchies (<Object_Hierarchy>), and zero or more entity relation graphs (<Entity_Relation_Graph>). Each one of these elements is described in detail below.

The multimedia stream element can include a unique identifier attribute ID. Descriptions of archives containing multimedia streams will use these IDs to reference
 10 multimedia streams.

An example of use a multimedia stream element is expressed in XML follows:

```

  <!-- A multimedia Stream -->
  <MM_Stream id="mmstream1">
    <!-- One multimedia object set -->
    <MM_Object_Set> </MM_Object_Set>
    <!-- Multiple object hierarchies -->
    <Object_Hierarchy> </Object_Hierarchy>
    ...
    <!-- Multiple entity relation graphs -->
    <Entity_Relation_Graph> </Entity_Relation_Graph>
    ...
  </MM_Stream>
  
```

15

20

The basic description element of the multimedia description scheme is the multimedia object element (<MM_Object>). The set of all the multimedia objects in a
 25 multimedia stream is included within the multimedia object set (<MM_Object_Set>).

A multimedia object element includes a collection of single-media objects from one or more media streams that together form a relevant entity for searching, filtering, or presentation. These single-media objects may be from the same media stream or different media streams. Usually, single-media objects are from different media (e.g., audio,

video, and text). These elements are defined in the description scheme of the corresponding media and may have associated hierarchies or entity relation graphs. For purposes of discussion, the definition of multimedia object also allows single-media objects of the same media type to be used. The single-media objects in a multimedia
 5 object do not need to be synchronized in time. In the following, “single-media object” and “media object” are used interchangeably.

The composing media objects (<Image_Object>, <Video_Object>, etc) inside a multimedia object are included in a media object set element (<Media_Object_Set>). A multimedia object element can also include zero or more object hierarchy elements
 10 (<Object_Hierarchy>) and entity relation graph elements (<Entity_Relation_Graph>) to describe spatial, temporal, and/or semantic relationships among the composing media objects.

Each multimedia object can have associated multiple features and corresponding feature descriptors, as discussed above. A multimedia object can include semantic
 15 information (e.g. annotations), temporal information (e.g. duration), and media specific information (e.g. compression format).

Two types of multimedia objects are used: local and global objects. A global multimedia object element represents the entire multimedia stream. On the other hand, a local multimedia object has a limited scope within the multimedia stream, for example,
 20 an arbitrarily shaped video object representing a person and a segmented audio object corresponding to his speech. To differentiate among local and global multimedia object, the multimedia object element includes a required attribute type, whose value can be LOCAL or GLOBAL. Only one multimedia object with a GLOBAL type will be included a multimedia stream description.

25 Each multimedia object element can also have four optional attributes: ID, Object_Ref, Object_Node_Ref, and Entity_Node_Ref. ID (or id) is a unique identifier of the multimedia object within the multimedia stream description. When the multimedia object acts as placeholder (i.e., no feature descriptors included) of another multimedia

object, Object_Ref references that multimedia object. Object_Node_Ref and Entity_Node_Ref include the lists of the identifiers of object node elements (<Object_Node>) and entity node elements (<Entity_Node>) that reference the multimedia object element, respectively.

- 5 Below, an example showing how these elements will be used in XML is included. Fig. 3 includes examples of global multimedia objects (mmog0), local multimedia objects (mmol1, mmol2, etc), and media objects (ao1g0, vog0, o0, etc). See Appendix B for the XML of the example in Fig. 3.

```

    <!-- A multimedia object set element -->
10  <MM_Object_Set>
        <!-- One or more multimedia objects -->
        <MM_Object type="GLOBAL" id="MMobj1" Object_Node_Ref="ON1"
            Entity_Node_Ref="EN1"...>
            <!-- A media object set -->
            <Media_Object_Set> </Media_Object_Set>
15  <!-- Multiple object hierarchies -->
            <Object_Hierarchy> </Object_Hierarchy>
            ...
            <!-- Multiple entity relation graphs -->
20  <Entity_Relation_Graph> </Entity_Relation_Graph>
            ...
            <!-- Zero or one multimedia object media feature element -->
            <MM_Obj_Media_Features> </MM_Obj_Media_Features>
            <!-- Zero or one multimedia object semantic feature element -->
25  <MM_Obj_Semantic_Features> </MM_Obj_Semantic_Features>
            <!-- Zero or one multimedia object temporal feature element -->
            <MM_Obj_Temporal_Features> </MM_Obj_Temporal_Features>
            </MM_Object>
            <MM_Object type="LOCAL" id="Mmobj2" Object_Node_Ref="ON2
30  ON10"
                Entity_Node_Ref="EN2 EN4 EN7"...>

```

```

        <!-- Content of MM Object -->
    </MM_Object>
    ...
</MM_Object_Set>

```

- 5 The set of all the single-media object elements (<Video_Object>, <Image_Object>, etc.) composing a multimedia object are included in the media object set element (<Media_Object_Set>). Each media object refers to one type of media, such as image, video, audio, synthetic video, and text. These media objects are defined in the description scheme of the corresponding type of media. It is important to point out that
- 10 the single-media objects and the multimedia objects share very similar structures at multiple levels although the features are different.

- In the same fashion as the multimedia objects, relationships among single-media objects can be described using media object hierarchies or entity relation graphs. Although entity relation graphs may lack the retrieval and transversal efficiency of
- 15 hierarchical structures, it is used when efficient hierarchical tree structures are not adequate to described specific relationships. Note that media object hierarchies may include media objects of different media types.

- In the multimedia integration description scheme 210, each multimedia object can contain three multimedia object feature elements that group features based on the
- 20 information they convey: media (<MM_Obj_Media_Features>), semantic (<MM_Obj_Semantic_Features>), and temporal (<MM_Obj_Temporal_Features>) information. Note that features associated with spatial positions of individual media objects (e.g., positions of video objects) are included in each specific single-media object. Spatial relationships among single-media objects inside a multimedia object are described
- 25 using the entity relation graphs. Table 1 includes examples of features for each feature type:

Table 1: Examples of feature classes and features.

Feature Class	Features
Media	Data Location, Scalable Representation, Modality Transcoding ¹
Semantic	Text Annotation ¹ , Who ¹ , What Object ¹ , What Action ¹ , Why ¹ , When ¹ , Where ¹ , Keywords
Temporal	Duration

¹ Defined in Image description scheme.

Each multimedia object feature element includes corresponding descriptor elements. Specific descriptors can include links to external extraction and similarity matching code. External document type definitions for descriptors can be imported and used in the current multimedia description scheme. In this framework, new features, types of features, and descriptors can be included in an extensible and modular way.

In Appendix A, the declarations of the following example features are included: Data_Location, Scalable_Representation, Text_Annotation, Keywords, and Duration.

Each object hierarchy element (<Object_Hierarchy>) includes one object node element (<Object_Node>). An object hierarchy element can include a unique identifier as an attribute ID, for referencing purposes. It can also include an attribute type, to describe the type of binding (e.g., semantic) expressed by the hierarchy.

At the same time, an object node element (<Object_Node>) includes zero or more object node elements forming a tree structure. Each multimedia object node references a multimedia object in the multimedia object set through an attribute, Object_Ref, by using the latter's unique identifier. Each object node element can also include a unique identifier in the form of an attribute ID. By including the object nodes' unique identifiers in their Object_Node_Ref attributes, multimedia objects can point back to object nodes referencing them. For efficient transversal of the multimedia description, this mechanism is provided to traverse from multimedia objects in the multimedia object set to corresponding object nodes in the object hierarchy and vice versa.

The hierarchy is a way to organize the multimedia objects in the multimedia object set. The multimedia objects in a multimedia stream can be organized based on different criteria: the temporal relationships, the semantic relationships, and the value of one or more features. The top object of each multimedia object hierarchy can specify the criteria followed to generate the hierarchy. An example multimedia object hierarchy is detailed in XML below:

```

    <!-- Object hierarchy element -->
    <Object_Hierarchy id=" ">
        <!-- One object node -->
10      <Object_Node id=" " Object_Ref=" ... "
            <!-- Multiple object nodes -->
            <Object_Node id=" ... " Object_Ref=" ... " >
                ...
            </Object_Node>
15      ...
        </Object_Node>
        ...
    </Object_Hierarchy>

```

Although a hierarchy is adequate for many purposes (e.g., A is the father of B) and is efficient in retrieval, some relationships among multimedia objects can not be expressed using a hierarchical structure (e.g., A is talking to B). For purposes of this discussion, the multimedia description scheme 210 also allows the specification of more complex relations among multimedia objects using an entity relation graph.

An entity relation graph element (<Entity_Relation_Graph>) includes one or more entity relation elements (<Entity_Relation>). It has two optional attributes, a unique identifier ID, and a string to describe the binding expressed by the graph, type.

An entity relation element (<Entity_Relation>) must include one relation element (<Relation>), zero or more entity node elements (<Entity_Node>), zero or more entity node set elements (<Entity_Node_Set>), and zero or more entity relation elements

(<Entity_Relation>). An optional attribute can be included in an entity relation element, type, to describe the type of relation it expresses.

Each entity node element references a multimedia object in the multimedia object set through an attribute, Object_Ref, by using the latter's unique identifier. Each entity node element can also include a unique identifier in the form of an attribute ID. By including the entity nodes' unique identifiers in their Entity_Node_Ref attributes, multimedia objects can point back to object nodes referencing them. For efficient transversal of the multimedia description, this mechanism is provided to traverse from multimedia objects in the multimedia object set to corresponding entity nodes in the ER graph and vice versa.

Hierarchies and entity relation graphs can be used to state spatial, temporal, and semantic relationships among media objects. Examples of such types of relationships are described below. In addition, the use of entity relation graphs is also described in more detail.

```

15      <Entity_Relation_Graph type="TEMPORAL.SMIL"1>
          <Entity_Relation type="TEMPORAL">
              <Relation With_Respect_To="MediaObject1">
                  <Temporal_Sequential pattern="DELAY" />
              </Relation>
20      <Entity_Node Media_Object_Ref="MediaObject1" />
          <Entity_Node Media_Object_Ref="MediaObject2" Start_Time="2"
          />

          <Entity_Relation>
              <Relation type="TEMPORAL">
25      <Temporal_Parallel />
              </Relation>
              <Entity_Node Media_Object_Ref="MediaObject3" />
              <!-- Optional start or end time -->

```

¹ In this example, SMIL temporal models are used.

```

        <Entity_Node Media_Object_Ref="MediaObject4"/>
      </Entity_Relation>
    </Entity_Relation>
  </Entity_Relation_Graph>
5  <Entity_Relation_Graph type="SPATIAL.2DSTRING">
    <Entity_Relation type="SPATIAL">
      <Relation With_Respect_To="MediaObject1">
        <Spatial_Arrangement At_Time="3">
          <Spatial_Relevance pattern="Upper_Right_Of"
10  />
        </Spatial_Arrangement>
      </Relation>
      <Entity_Node Media_Object_Ref="MediaObject1" />
      <Entity_Node Media_Object_Ref="MediaObject2" />
15  <Entity_Node Media_Object_Ref="MediaObject3" />
    </Entity_Relation>
    <Entity_Relation type="SPATIAL">
      <Relation With_Respect_To="MediaObject2">
        <Spatial_Arrangement At_Time=3>
20  <Spatial_Relevance pattern="Lower_Left_Of "
      />
    </Spatial_Arrangement>
  </Relation>
  <Entity_Node Media_Object_Ref="MediaObject3" />
25  <Entity_Node Media_Object_Ref="MediaObject1" />
  <Entity_Node Media_Object_Ref="MediaObject2" />
</Entity_Relation>
</Entity_Relation_Graph>

```

The content of the relation could be particularized for each different scenario. In
 30 Appendix A, temporal, spatial, and semantic relations are included. Similar types of
 relations could be added as needed. Acceptable relationships for specific applications can

be defined in advance. The content of this element states the relation among the entity nodes included in that entity relation element.

Many different types of relations can be declared among multiple objects in the object set; spatial (topological or directional), temporal (topological or directional), semantic are just some type examples. An example of entity relation graph was included above to show how these structures could be used to describe temporal and spatial relationships among media objects. The same example is also valid for multimedia objects (Appendix B).

Fig. 6 is an exemplary flowchart of the multimedia integration description process. The process begins in step 610, multimedia content is received by the global description generator 115 and one or more of the image description generator 125, video description generator 130, audio description generator 135, synthetic description generator 140 and the text description generator 145. In step 620, the multimedia components are separated and at step 630 the single media event is classified within each of the multimedia categories in the description generators 125-145.

In step 640, the description generators 125-145 generate descriptions from each respective multimedia category which are then forwarded to the multimedia integration description generator 165. In step 650, the multimedia integration description generator 165 puts the descriptions into the proper format using the multimedia integration description scheme provided by the multimedia integration description scheme unit 170.

Then, in step 660, the multimedia integration description generator 165 integrates the multimedia descriptions and in step 670, the integrated descriptions are stored in database 160. The process then ends.

While the invention has been described with reference to the embodiments, it is to be understood that the invention is not restricted to the particular forms shown in the foregoing embodiments. Various modifications and alternations can be made thereto without departing from the scope of the invention.

WHAT IS CLAIMED IS:

- 1 1. A method for integrating multimedia descriptions, comprising:
2 receiving multimedia content;
3 separating the multimedia content into multimedia categories;
4 generating multimedia descriptions from each multimedia category;
5 integrating the multimedia descriptions from each category using a
6 multimedia integration description scheme; and
7 storing the integrated multimedia description into a database.
- 1 2. The method of claim 1, wherein the multimedia categories include at least one
2 of image, audio, video, synthetic, and text.
- 1 3. The method of claim 1, wherein the multimedia descriptions include
2 descriptors, the descriptors defining a portion of the multimedia content.
- 1 4. The method of claim 3, wherein the descriptors include descriptor values, the
2 descriptor values of descriptors from at least one multimedia description being combined
3 with the descriptor values of at least one other multimedia description using the
4 multimedia integration description scheme.
- 1 5. The method of claim 1, wherein the multimedia integration description
2 scheme is compatible with MPEG-7.
- 1 6. The method of claim 1, wherein the multimedia integration description
2 scheme includes at least one of image, audio, video, synthetic, and text description
3 schemes.
- 1 7. The method of claim 6, wherein the description schemes and the multimedia
2 integration description schemes use a compatible description definition language.
- 1 8. The method of claim 1, further comprising:
2 receiving a request for the integrated multimedia description from a search
3 engine server;
4 retrieving the integrated multimedia description from the database; and
5 providing the integrated multimedia description to the search engine server
6 in response to the request.

1 9. The method of claim 1, wherein within the multimedia integration description
2 scheme a multimedia stream is represented as a set of relevant multimedia objects that
3 can be further organized by using object hierarchies.

1 10. The method of claim 9, wherein relationships among multiple multimedia
2 objects are expressed using at least one of a tree structure and an entity relation graph.

1 11. The method of claim 1, wherein the integrated multimedia description is
2 represented in a document type definition in eXtensible Markup Language (XML).

1 12. The method of claim 1, wherein a client/server system uses the multimedia
2 integration scheme to perform a search in response to a user's query.

1 13. A system that integrates multimedia descriptions, comprising:
2 a plurality of description generators that receive multimedia content,
3 separate the multimedia content into multimedia categories, and generating multimedia
4 descriptions from each multimedia category; and
5 a multimedia integration description generator that integrates the
6 multimedia descriptions generated by the plurality of description generators from each
7 category, using a multimedia integration description scheme, and stores the integrated
8 multimedia description into a database.

1 14. The system of claim 13, wherein the multimedia categories include at least
2 one of image, audio, video, synthetic, and text.

1 15. The system of claim 13, wherein the multimedia descriptions include
2 descriptors, the descriptors defining a portion of the multimedia content.

1 16. The system of claim 15, further comprising:
2 an integration description unit that provides descriptor values from the
3 descriptors to the multimedia integration description generator, the descriptor values of
4 descriptors from at least one multimedia description being combined with the descriptor
5 values of at least one other multimedia description using the multimedia integration
6 description scheme.

1 17. The system of claim 13, wherein the multimedia integration description
2 scheme is compatible with MPEG-7.

1 18. The system of claim 13, wherein the multimedia integration description
2 scheme is generated by a multimedia description scheme unit and includes at least one of
3 image, audio, video, synthetic, and text description schemes.

1 19. The system of claim 18, wherein the description schemes and the multimedia
2 integration description schemes use a compatible description definition language.

1 20. The system of claim 13, wherein the multimedia integration description
2 generator receives a request for the integrated multimedia description from a search
3 engine server, retrieves the integrated multimedia description from the database, and
4 provide the integrated multimedia description to the search engine server in response to
5 the request.

1 21. The system of claim 13, wherein within the multimedia integration
2 description scheme a multimedia stream is represented as a set of relevant multimedia
3 objects that can be further organized by using object hierarchies.

1 22. The system of claim 21, wherein relationships among multiple multimedia
2 objects are expressed using at least one of a tree structure and an entity relation graph.

1 23. The system of claim 13, wherein the integrated multimedia description is
2 represented in a document type definition in eXtensible Markup Language (XML).

1 24. The system of claim 13, wherein a client/server system uses the multimedia
2 integration scheme to perform a search in response to a user's query.

ABSTRACT OF THE DISCLOSURE

The invention provides a system and method for integrating multimedia descriptions in a way that allows humans, software components or devices to easily
5 identify, represent, manage, retrieve, and categorize the multimedia content. In this manner, a user who may be interested in locating a specific piece of multimedia content from a database, Internet, or broadcast media, for example, may search for and find the multimedia content. In this regard, the invention provides a system and method that receives multimedia content and separates the multimedia content into separate
10 components which are assigned to multimedia categories, such as image, video, audio, synthetic and text. Within each of the multimedia categories, the multimedia content is classified and descriptions of the multimedia content are generated. The descriptions are then formatted, integrated, using a multimedia integration description scheme, and the multimedia integration description is generated for the multimedia content. The
15 multimedia description is then stored into a database. As a result, a user may query a search engine which then retrieves the multimedia content from the database whose integration description matches the query criteria specified by the user. The search engine can then provide the user a useful search result based on the multimedia integration description.

100

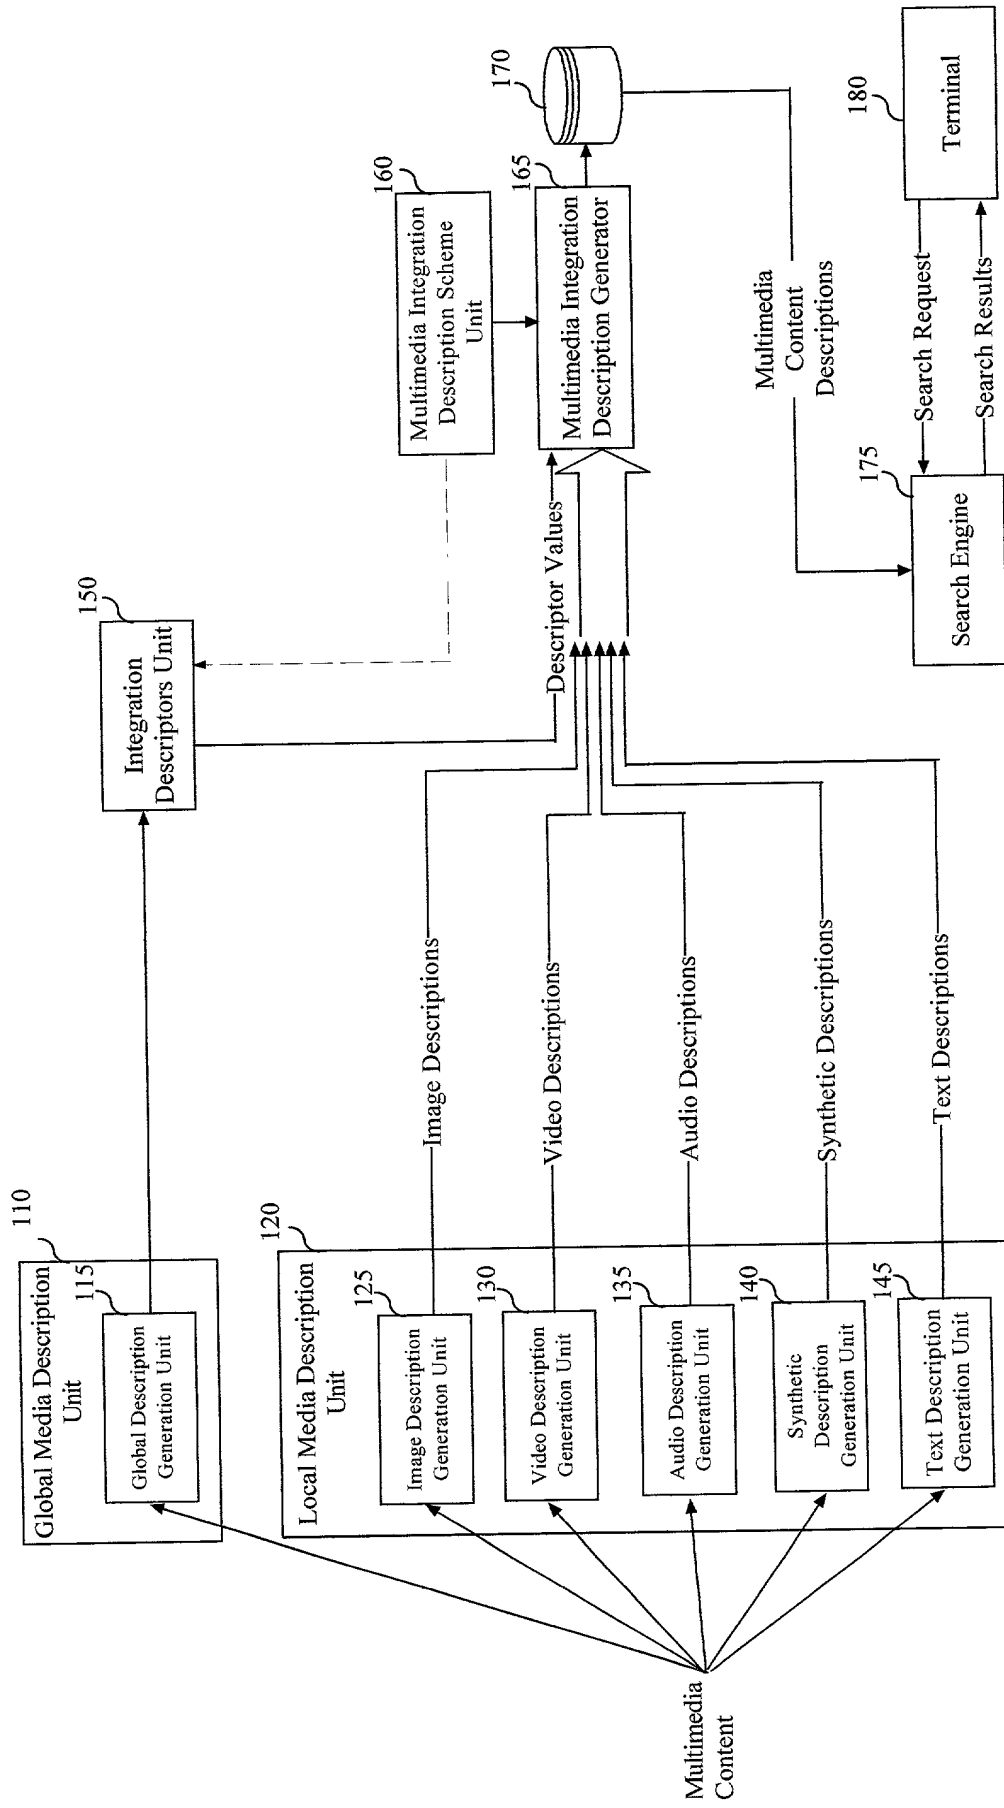


Fig. 1A

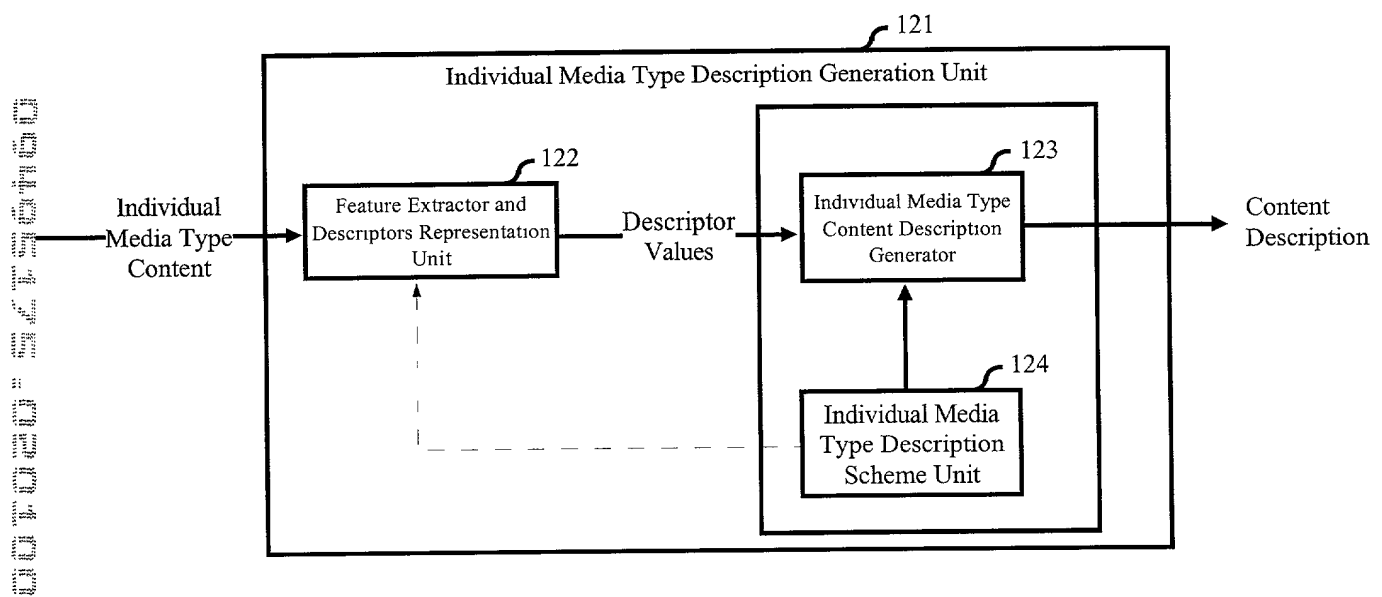


Fig. 1B

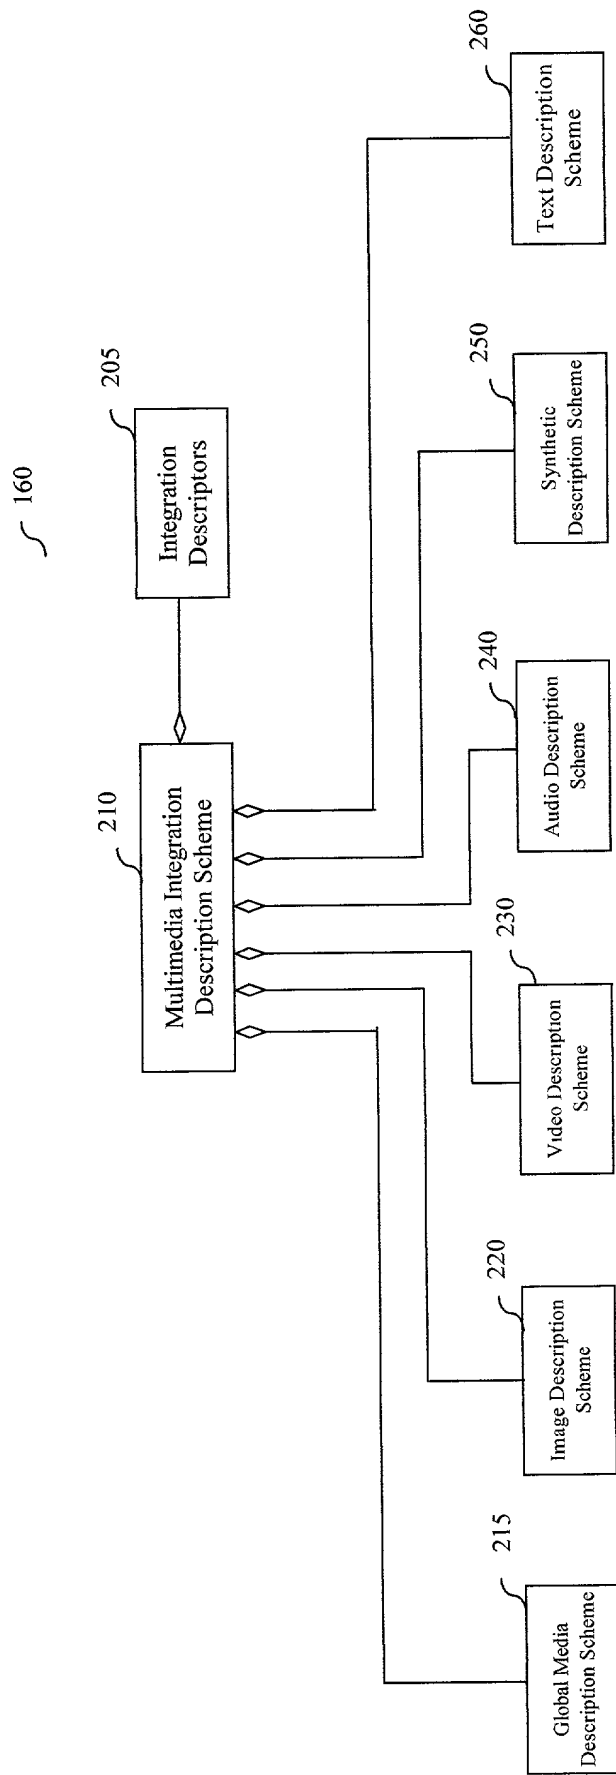


Fig. 2


Downloaded from www.ascelibrary.org

MM Obj: Tiger News [mmog0]


MM Obj: Anchorperson [mmol4]

MM Obj: Tiger [mmol5]



MM Obj: Audio1 [mmol1]: Anchorperson

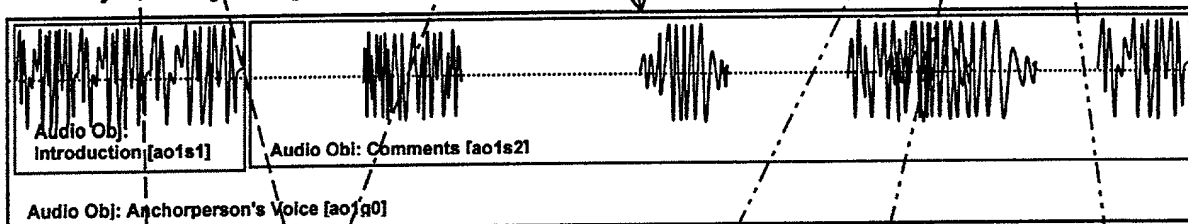

MM Obj: Audio2 [mmol2]: Tiger

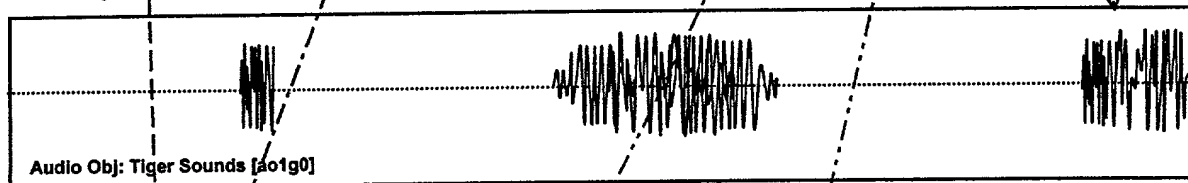

MM Obj: Video [mmol3]: Tiger News

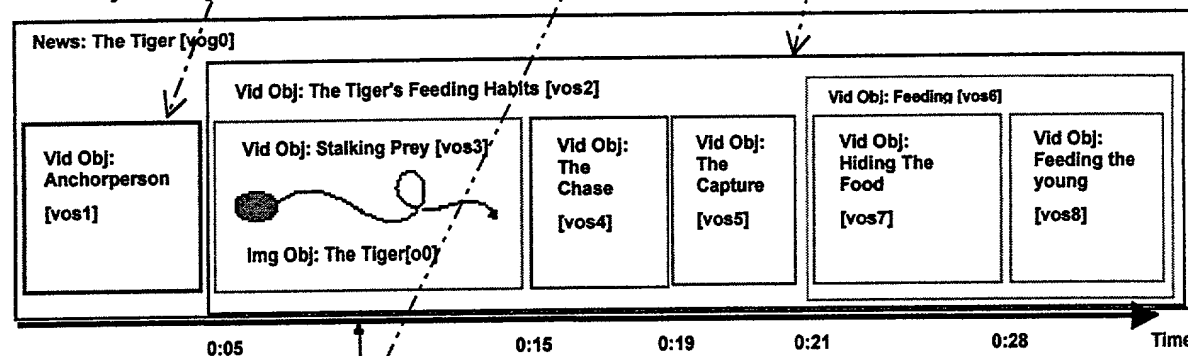

Video Frame

FIG. 3

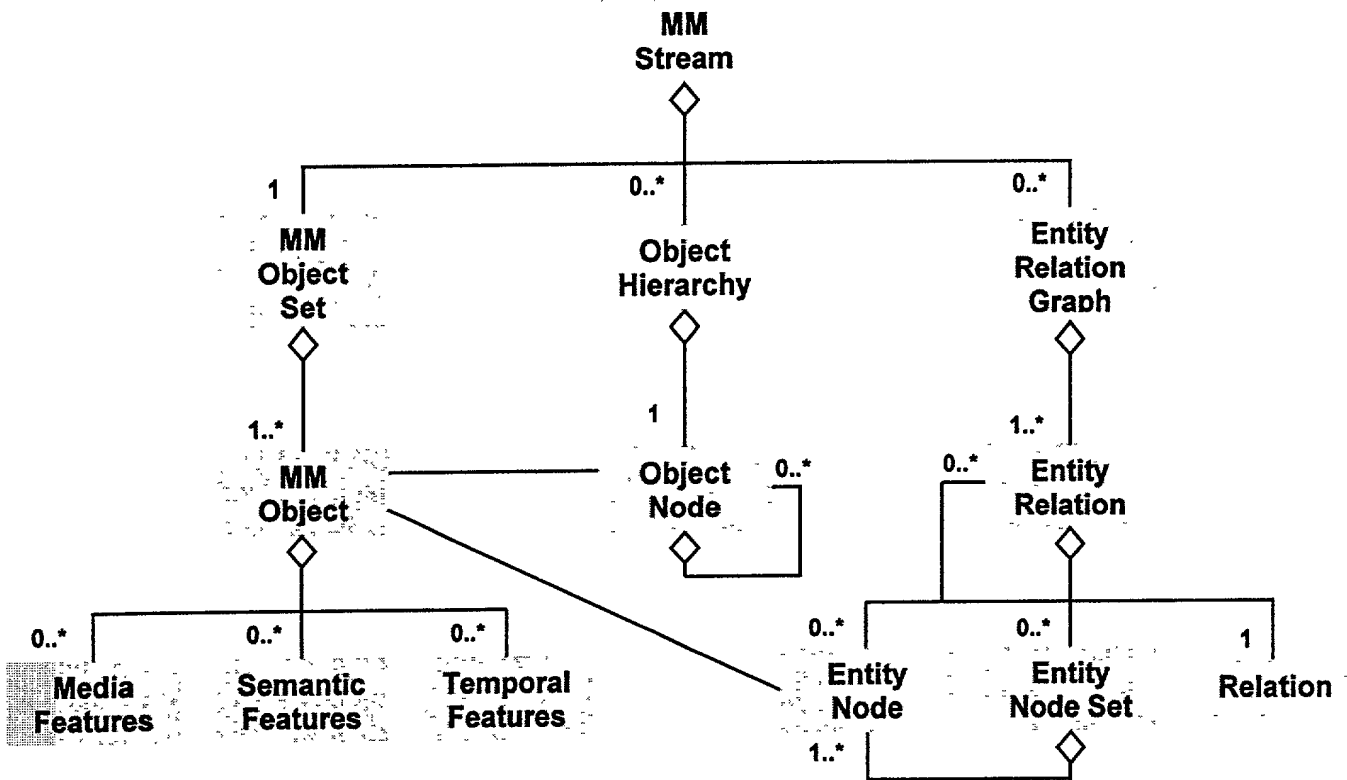


FIG. 4

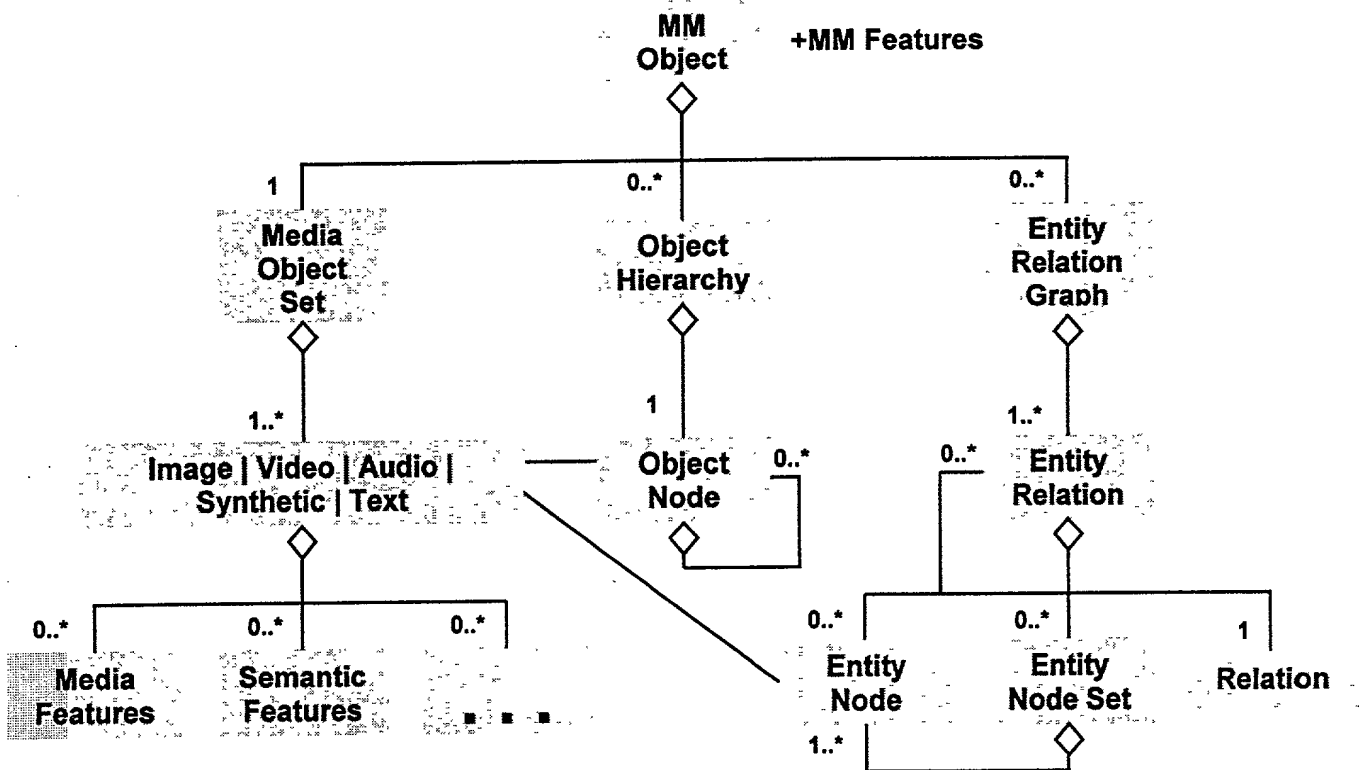


FIG. 5

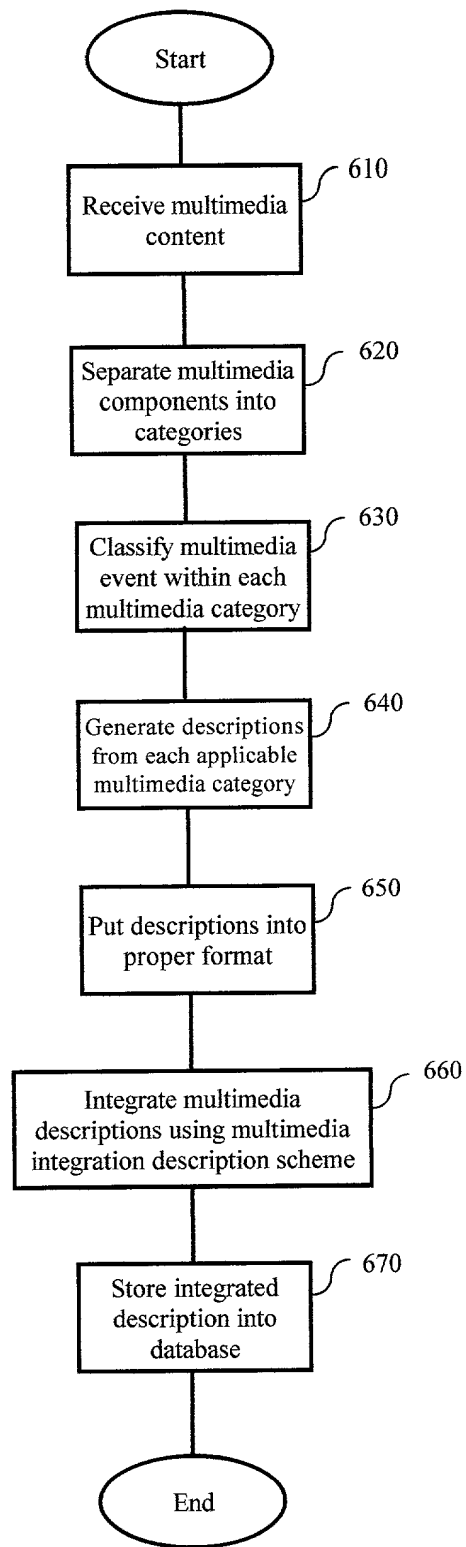


Fig. 6

APPENDIX A: Document Type Definition of Multimedia Integration Description Scheme

MM_integration_ds.dtd

5

```
<!-- Multimedia Integration Description Scheme -->
```

```
<!ELEMENT MM_Stream ( MM_Object_Set, Object_Hierarchy*,  
Entity_Relation_Graph* )>
```

10

```
<!ATTLIST MM_Stream  
id ID #IMPLIED>
```

```
<!-- This is how external DTDs are included in the current DTD -->
```

15

```
<!-- External Video DS DTD -->
```

```
<!ENTITY % Video_DS SYSTEM "video_ds.dtd">  
%Video_DS;
```

```
<!-- External Audio DS DTD -->
```

20

```
<!ENTITY % Audio_DS SYSTEM "audio_ds.dtd">  
%Audio_DS;
```

```
<!-- External Text DS DTD -->
```

25

```
<!ENTITY % Text_DS SYSTEM "text_ds.dtd">  
%Text_DS;
```

```
<!-- External Synthetic DS DTD -->
```

30

```
<!ENTITY % Synthetic_DS SYSTEM "synthetic_ds.dtd">  
%Synthetic_DS;
```

```
<!-- External Image DS DTD -->
```

```
<!ENTITY % Image_DS SYSTEM "image_ds.dtd">  
%Image_DS;
```

35

```
<!ELEMENT MM_Object_Set ( MM_Object+ )>
```

```
<!ELEMENT MM_Object ( Media_Object_Set, Object_Hierarchy*,  
Entity_Relation_Graph*,
```

40

```
MM_Obj_Media_Features?, MM_Obj_Semantic_Features?,  
MM_Obj_Temporal_Features? )>
```

```
<!ATTLIST MM_Object
```

```
Object_Type
```

```
(LOCAL|GLOBAL)
```

```
#REQUIRED
```


<!ELEMENT Relation Temporal_Parallel| Temporal_Sequential |
 Spatial_Alignment | Spatial_Arrangement |
 Semantic_Relation | code)*>
 5 <!ATTLIST Relation
 With_Respect_To IDREF #IMPLIED >

 <!ELEMENT Temporal_Parallel EMPTY >
 <!ELEMENT Temporal_Sequential EMPTY >
 10 <!ATTLIST Temporal_Sequential
 Pattern (EXACT|DELAY|PRIOR) "EXACT" >

 <!ELEMENT Spatial_Alignment EMPTY >
 <!ATTLIST Spatial_Alignment
 15 Pattern (Left_Align | Right_Align |
 Top_Align | Bottom_Align) "Left_Align"
 At_Time CDATA #IMPLIED >

 <!ELEMENT Spatial_Arrangement (Spatial_Relevance | Spatial_Positioning)? >
 20 <!ATTLIST Spatial_Arrangement
 At_Time CDATA #IMPLIED >
 <!ELEMENT Spatial_Relevance EMPTY >
 <!ATTLIST Spatial_Relevance
 25 Pattern (Top_Of | Bottom_Of | Left_Of | Right_Of |
 Upper_Left_Of | Upper_Right_Of | Lower_Left_Of |
 Lower_Right_Of |
 Adjacent_To | Neighboring_To | Near_By |
 Within | Contained_In) "Top_Of" >

 30 <!ELEMENT Spatial_Positioning EMPTY >
 <!ATTLIST Spatial_Positioning
 Horizontal_Shift CDATA #IMPLIED
 Vertical_Shift CDATA #IMPLIED >

 35 <!ELEMENT Semantic_Relation (Keywords* | code*)? >

 <!ELEMENT MM_Obj_Media_Features (Data_Location?, Scalable_Representation?,
 Modality_Transcoding?)>
 40 <!ELEMENT MM_Obj_Semantic_Features (Text_Annotation?, Keywords?)>

 <!ELEMENT MM_Obj_Temporal_Features (Duration?)>

```

<!ELEMENT Keywords ( Word*, Code* ) >
<!ATTLIST  Keywords
           No-Words          CDATA          #REQUIRED
           Language          CDATA          "English"
           Extraction_Manner (AUTOMATIC|MANUAL) "MANUAL" >

<!ELEMENT Duration      (
           Image_Duration?,
           Audio_Duration?,
           Video_Duration?,
           Text_Duration?,
           Synthetic_Duration? ) >
<!ATTLIST  Duration
           Synchronized_Overall_Duration CDATA #IMPLIED >

<!ELEMENT Image_Duration ( Time ) >
<!ELEMENT Audio_Duration ( Time ) >
<!ELEMENT Video_Duration ( Time ) >
<!ELEMENT Synthetic_Duration ( Time ) >
<!ELEMENT Text_Duration ( Time? | Alignment? ) >
<!ELEMENT Alignment      EMPTY >
<!ATTLIST  Alignment
           with (IMAGE|AUDIO|VIDEO|SYNTHETIC) "AUDIO" >

<!ELEMENT Data_Location(
           Image_Location?,
           Audio_Location?,
           Video_Location?,
           Text_Location?,
           Synthetic_Location? ) >

<!ELEMENT Image_Location (location) >
<!ELEMENT Audio_Location (location) >
<!ELEMENT Video_Location (location) >
<!ELEMENT Text_Location (location) >
<!ELEMENT Synthetic_Location (location) >

<!ELEMENT Scalable_Representation      (
           Static_Sampled?,
           Dynamic_Condensed? ) >

<!ELEMENT Static_Sampled (
           Image_Condensed?,
           Video_Static_Pictures?,
           Audio_Clips?,

```

```

Synthetic_Pictures?) >
<!--ELEMENT Image_Condensed ( Location*, Image_Scl*, Image_Subsampling* ) >
<!--ELEMENT Image_Subsampling ( Image_Subsampling_Para, code)* >
<!--ELEMENT Image_Subsampling_Para EMPTY >
5 <!--ATTLIST Image_Subsampling_Para
    Scheme CDATA #REQUIRED
    Spatial_Rate CDATA #REQUIRED
    Frame_Size CDATA #IMPLIED >
<!--ELEMENT Video_Static_Pictures (Key_Frame* ) >
10 <!--ATTLIST No_KFs CDATA #REQUIRED >
<!--ELEMENT Audio_Clips (Audio_Object* | Audio_Hierarchy*) >
<!--ATTLIST No_Clips CDATA #REQUIRED >
<!--ELEMENT Synthetic_Pictures (Key_Frame)* >
<!--ATTLIST No-KFs CDATA #REQUIRED >
15
<!--ELEMENT Dynamic_Condensed (
    Visual_Condensed?,
    Audio_Condensed?,
    Text_Condensed?,
20 Synthetic_Condensed?) >

<!--ELEMENT Visual_Condensed ( Location*, Video_Scl*, Video_Subsampling* ) >
<!--ELEMENT Video_Subsampling ( Video_Subsampling_Para, code)* >
<!--ELEMENT Video_Subsampling_Para EMPTY >
25 <!--ATTLIST Video_Subsampling_Para
    Scheme CDATA #REQUIRED
    Temporal_Rate CDATA #IMPLIED
    Spatial_Rate CDATA #IMPLIED
    Frame_Size CDATA #IMPLIED >
30 <!--ELEMENT Audio_Condensed ( Location*,
    Audio_Compressed*,
    Audio_Subsampling*,
    Audio_Timescaled* ) >

<!--ELEMENT Audio_Compressed ( Audio_Compress_Para, code)* >
35 <!--ELEMENT Audio_Compress_Para EMPTY >
<!--ATTLIST Audio_Compress_Para
    Scheme CDATA #REQUIRED
    Bitrate CDATA #IMPLIED >

<!--ELEMENT Audio_Subsampling ( Audio_Subsampling_Para, code)* >
40 <!--ELEMENT Audio_Subsampling_Para EMPTY >
<!--ATTLIST Audio_Subsampling_Para
    Scheme CDATA #REQUIRED
    Temporal_Rate CDATA #IMPLIED >
<!--ELEMENT Audio_Timescaled (Audio_Timescale_Para, code)* >

```

```

<!-- Audio_Timescale_Para EMPTY -->
<!-- ATTLIST Audio_Timescale_Para
      Scale_Rate      CDATA #REQUIRED -->

5  <!-- Text_Condensed (Text_Abstract*) -->
   <!-- ELEMENT Text_Abstract (Location*, (Text_Abstract_Para, code)*)? -->
   <!-- ATTLIST Text_Abstract
           Length_In_Words      CDATA      #IMPLIED
           Duration_In_Seconds  CDATA      #IMPLIED
10  Language                    CDATA      "English"
           Generation_Mode      (AUTOMATIC|MANUAL) "MANUAL" -->
   <!-- ELEMENT Text_Abstract_Para EMPTY -->
   <!-- ATTLIST Text_Abstract_Para
           Length_In_Words      CDATA      #IMPLIED
15  Language                    CDATA      "English" -->

   <!-- Synthetic_Condensed (Synthetic_Location*, (Synthetic_Condense_Para,
code)*) -->
   <!-- ELEMENT Synthetic_Condense_Para EMPTY -->
20 <!-- ATTLIST Synthetic_Condense_Para
           Spatial_Rate          CDATA      #REQUIRED
           Temporal_Rate         CDATA      #REQUIRED
           Frame_Size            CDATA      #REQUIRED
           Bitrate               CDATA      #IMPLIED -->

25 <!-- Multimedia Integration DS End -->

```


APPENDIX B: XML for Example in Figure 3

TigerNews.xml:

```

5  <!-- Tiger News MM Description -->

   <MM_Stream id="TigerNews5-28-1000">
     <MM_Object_Set>

10       <!-- Tiger News -->
       <MM_Object type="GLOBAL" id="mmog0"
Object_Node_Ref="mmon0">
         <MM_Obj_Semantic_Features>
           <who> <concept> Anchorperson: S. Paek </concept>

15 </who>

           <what_object> <concept> The Tiger </concept>

</what_object>

           <what_action>
             <concept> Tiger is Feeding </concept>

20 </what_action>
           <where> <concept> Nigeria, Africa </concept> </where>
           <when> <concept> May 28, 2000 </concept> </when>
           <why> <concept> Nature news </concept> </why>
         </MM_Obj_Semantic_Features>
         <MM_Obj_Temporal_Features>
           <Duration> ... </Duration>
         </MM_Obj_Semantic_Features>
       </MM_Object>

25

       <!-- Audio 1: Anchorperson -->
       <MM_Object type="LOCAL" id="mmol1" Object_Node_Ref="mmon1"
Entity_Node_Ref="mmen1">
         <Media_Object_Set>
           <!-- Global audio object -->
           <Audio_Object type="GLOBAL" id="ao1g0"
35 Object_Node_Ref="mmol1on0">
             <!-- Features of the audio object: semantics, media,
etc -->

             </Audio_Object>

40           <!-- Introduction of news report -->
           <Audio_Object type="SEGMENT" id="ao1s1"
Object_Node_ref="mmol1on1"
Entity_Node_Ref="mmol1en1">

```

```

                                <!-- Features of the audio object: semantics, media,
etc -->
                                </Audio_Object>
                                <!-- Comments on news -->
5                                <Audio_Object type="SEGMENT" id="ao1s2"
                                Object_Node_ref="mmol1on2"
                                Entity_Node_Ref="mmol1en2">
                                <!-- Features of the audio object: semantics, media,
etc -->
10                                </Audio_Object>
                                </Media_Object_Set>
                                <Object_Hierarchy>
                                <Object_Node id="mmol1on0" Object_Ref="ao1g0">
                                <Object_Node id="mmol1on1" Object_Ref="ao1s1"
15 />
                                <Object_Node id="mmol1on0" Object_Ref="ao1s2"
/>
                                </Object_Node>
                                </Object_Hierarchy>
20 <Entity_Relation_Graph type="TEMPORAL">
                                <Entity_Relation>
                                <Relation type="TEMPORAL">
                                <Temporal_Sequential />
                                </Relation>
25 <Entity_Node id="mmol1en1" Objec_Ref="ao1s1"
/>
                                <Entity_Node id="mmol1en2" Objec_Ref="ao1s2"
/>
                                </Entity_Relation>
30 </Entity_Relation_Graph>
                                <MM_Obj_Media_Features>
                                <Data_Location> ... </Data_Location>
                                </MM_Obj_Media_Features>
                                <MM_Obj_Semantic_Features> ...
35 </MM_Obj_Semantic_Features>
                                <MM_Obj_Temporal_Features> ...
                                </MM_Obj_Temporal_Features>
                                </MM_Object>
40
                                <!-- Audio 2: Tiger -->
                                <MM_Object type="LOCAL" id="mmol2" Object_Node_Ref="mmon2"
                                Entity_Node_Ref="mmen2">
                                <!-- Single-media objects and features -->
                                </MM_Object>

```

```

5      <!-- Video: Tiger News' Video -->
      <MM_Object type="LOCAL" id="mmol3" Object_Node_Ref="mmon3"
          Entity_Node_Ref="mmen3">
          <!-- Single-media objects and features -->
      </MM_Object>

      <!-- Anchorperson -->
      <!-- Groups the objects related to Anchorperson across media -->
10     <MM_Object type="LOCAL" id="mmol4" ... >
          <Media_Object_Set>
              <Video_Object type="SEGMENT" Object_Ref="vos1" />
              <Audio_Object type="GLOBAL" Object_Ref="ao1g0" />
          </Media_Object_Set>
15     </MM_Object>

      <!-- Tiger -->
      <MM_Object type="LOCAL" id="mmol5" ... >
          <!-- Object and features -->
20     </MM_Object>
  </MM_Object_Set>

  <Object_Hierarchy>
      <Object_Node id="mmon0" Object_Ref="mmog0">
25         <Object_Node id="mmon1" Object_Ref="mmol1" />
         <Object_Node id="mmon2" Object_Ref="mmol2" />
         <Object_Node id="mmon3" Object_Ref="mmol3" />
      </Object_Node>
  </Object_Hierarchy>

30  <Entity_Relation_Graph type="TEMPORAL.SMIL">
      <Entity_Relation>
          <Relation type="TEMPORAL">
              <Temporal_Parallel />
35         </Relation>
          <Relation_Node id="mmen1" Object_Ref="mmol1" />
          <Relation_Node id="mmen2" Object_Ref="mmol2" />
          <Relation_Node id="mmen3" Object_Ref="mmol3" />
          </Entity_Relation>
40  </Entity_Relation_Graph>

  </MM_Stream>

  <!-- Tiger News MM Description -->

```